


# Maxspect Recurve / Programm SPS / 10'000 Kelvin / Hawaii Purple

## Leistungsaufnahme

85.1 - 85.6 Watt

## Messinstrument

Spektrometer & Flickermeter Lighting Passport Pro Essence  
Abstand 30cm

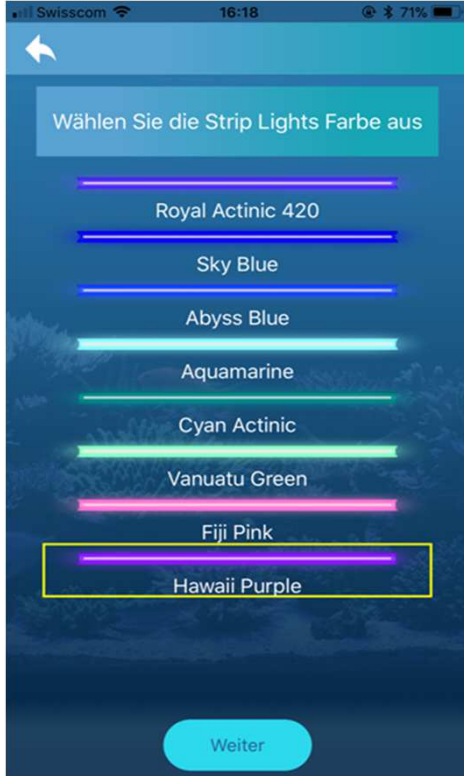


Parameter	Value
PPFD (400~700 nm)	326.12 $\mu\text{mol}/\text{m}^2\text{s}$
PPFD FR (701~780 nm)	8.5374 $\mu\text{mol}/\text{m}^2\text{s}$
PPFD R (600~700 nm)	100.56 $\mu\text{mol}/\text{m}^2\text{s}$
PPFD G (500~599 nm)	112.30 $\mu\text{mol}/\text{m}^2\text{s}$
PPFD B (400~499 nm)	113.28 $\mu\text{mol}/\text{m}^2\text{s}$
PPFD UV (380~399 nm)	0.7354 $\mu\text{mol}/\text{m}^2\text{s}$
YPFD (400~700 nm)	159.03 $\mu\text{mol}/\text{m}^2\text{s}$
YPFD (380~780 nm)	159.23 $\mu\text{mol}/\text{m}^2\text{s}$
YPFD FR (701~780 nm)	0.0442 $\mu\text{mol}/\text{m}^2\text{s}$
YPFD R (600~700 nm)	12.251 $\mu\text{mol}/\text{m}^2\text{s}$
YPFD G (500~599 nm)	59.719 $\mu\text{mol}/\text{m}^2\text{s}$
YPFD B (400~499 nm)	87.082 $\mu\text{mol}/\text{m}^2\text{s}$
YPFD UV (380~399 nm)	0.1197 $\mu\text{mol}/\text{m}^2\text{s}$
R/ B	0.89
R/ FR	11.78
DLI	28.177 $\text{mol}/\text{m}^2$
Beleuchtungsstärk	18'095 lux
$\lambda_p$ (380~780 nm)	443 nm
$\lambda_D$ (380~780 nm)	0 nm
CCT	8'038 K
CRI	0
Flicker Percentage	8.40%
Flicker Index	0.02
Flicker Frequency	33 Hz

## Hauptkanäle



## Farbtafel

### CIE1931

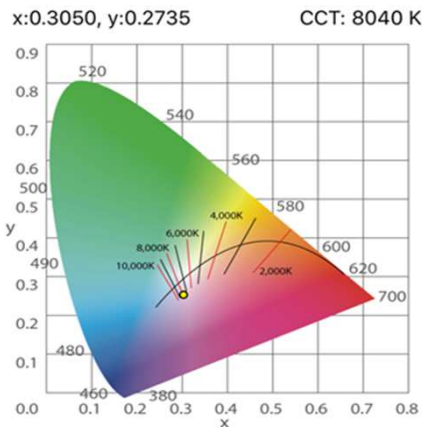

## Spektrum

